

Standard of Mid-class

SM Series

Specifications



Model Name			SM471 PLUS	SM481 PLUS	SM482 PLUS	SM485
Alignment			Fly Camera	Fly Camera + Fix Camera (Option)	Fly Camera + Fix Camera	Fly Camera + Fix Camera
Number of Spindles			10 Spindes x 2 Gantry	10 Spindes x 1 Gantry	6 Spindes x 1 Gantry	4+1 Spindes x 1 Gantry
Placement Speed			78,000CPH (Optimum)	40,000CPH (Optimum)	30,000CPH (Optimum)	22,000CPH (Optimum)
Placement Accuracy	Chip		±40μm@±3σ	±40μm@±3σ	±40μm@±3σ	±40μm@±3σ
	QFP		±50μm@±3σ	±30μm@±3σ	±30μm@±3σ	±30μm@±3σ
Component Range	* Fly Camera	Chip IC, Connector BGA, CSP	0402 ~ □ 14mm	0402 ~ □ 16mm	0603 ~ □ 22mm (** 0402 ~ □ 14mm)	0402 ~ □ 21mm
	** Fix Camera	IC, Connector BGA, CSP	-	□ 16mm ~ □ 42mm (Standard) □ 42mm ~ □ 55mm (MFOV) L55mm ~ L75mm Connector (MFOV)		□ 16mm ~ □ 42mm (Standard) □ 42mm ~ □ 55mm (MFOV) L75mm ~ L150mm Connector (MFOV)
	Max. Height		12mm	10mm (Fly) 15mm (Fix)	12mm (Fly) 15mm (Fix)	15mm (Fly) 26mm (Fix)

* SM471 PLUS, SM481 PLUS, SM485 Fly Camera Spec. : Based on Mega FOV 24mm (SM482 PLUS Fly Camera Spec. : Based on Mega FOV 25mm)

** SM481 PLUS, SM482 PLUS, SM485 Fix Camera Spec. : Based on Mega FOV 45mm (Mega FOV 35mm : Option)

*** SM482 PLUS can mount 0402 ~ □ 14mm when Fly Camera Mega FOV 16mm is applied.

PCB Size (mm)	Min.		L50 x W40			
	Max.	Single Lane	~ L510 x W460 ~ L610 x W460 (Option)	~ L460 x W400 ~ L510 x W460 (Option) ~ L610 x W510 (Option) ~ Max. L1,500 x W460 (Option)	~ L460 x W400 ~ L510 x W460 (Option) ~ L610 x W510 (Option) ~ Max. L1,200 x W510 (Option)	~ L460 x W400 ~ Max. L740 x W460 (Option)
		Dual Lane	~ L460 x W250 ~ L610 x W250 (Option)	-	-	-
	PCB Thickness		0.38 ~ 4.2			
Feeder Capacity (8mm standard)			120ea/112ea (Docking Cart)			
Utility	Power		AC200 / 208 / 220 / 240 / 380 / 415V (50/60Hz, 3Phase)			
			Max. 5.0kVA	Max. 3.5kVA	Max. 3.5kVA	Max. 3.5kVA
	Air Consumption		0.5 ~ 0.7MPa (5.0 ~ 7.0kgf/cm²)			
			350Nℓ/min 50Nℓ/min (Vacuum Pump)	160Nℓ/min 50Nℓ/min (Vacuum Pump)	180Nℓ/min 50Nℓ/min (Vacuum Pump)	180Nℓ/min 50Nℓ/min (Vacuum Pump)
Mass (kg)			Approx. 1,730	Approx. 1,655	Approx. 1,575	Approx. 1,600
External Dimension (mm)			L1,650 x D1,690 x H1,485	L1,650 x D1,680 x H1,530	L1,650 x D1,680 x H1,530	L1,650 x D1,680 x H1,530

• **USA** 6000 Phyllis Dr. Cypress, CA 90630, USA Tel : +1-714-373-4200
• **Europe** Tel : +82-70-7147-6322, 6311 Fax : +82-31-8018-3721
• **Asia** Tel : +82-70-7147-6320, 6323 Fax : +82-31-8018-3721
• **Head Office** 6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea

• The dimensions, product specifications and values in this catalog are actual values measured under conditions designated by our company.
• The above items may differ depending on actual operating conditions. For the details related to options, please contact the person responsible for sales.

Doc. No: SMT-SM-CAT-EN-001 © 2019 Hanwha Precision Machinery Co., Ltd. All rights reserved.



Experience Your **SMART FACTORY**



Standard of Mid-class

SM Series




Hanwha Bestseller

Know-how Accumulated over 30 Years!


With 17,000 sets having been sold since its market launch in 2005, the SM series component placers Hanwha's best selling products. Please experience Hanwha's know-how with the SM series component placers verified by many customers worldwide.



Accumulated production of 17,000 sets

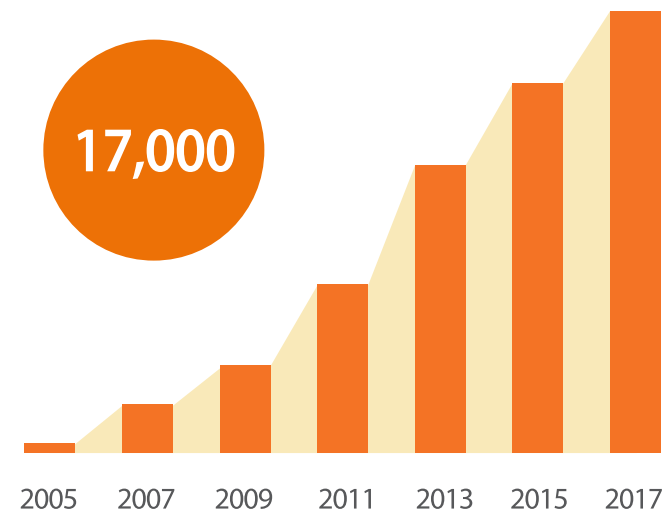

No. 1 in the industry of medium speed component placers

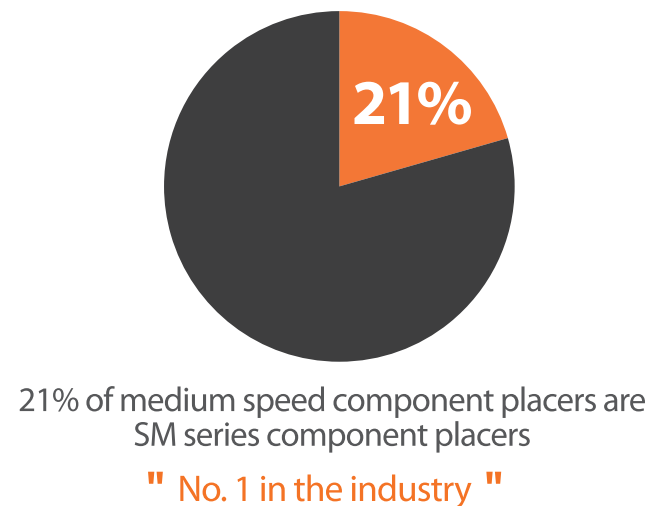

Outstanding Cost Performance

As a standard of medium speed component placers, SM series component placers provide all essential functions necessary for PCB production at a reasonable price, allowing investment to be returned in a short period of time.



The highest performance among the component placers of the same class

Optimized to various production environments with a line-up of the highest speed/accuracy among component placers of the same class.


Description		SM471PLUS	SM481PLUS	SM482PLUS
Speed	Optimum	78,000 CPH	40,000 CPH	30,000 CPH
Accuracy	0402	±40μm	±40μm	±40μm
	BGA/QFP	±50μm	±30μm	±30μm

SM Series Common Feature

Convenient in-line operation through unification of main modules and in-line platform

On-the-fly Placement Method

Owing to Hanwha's own On-the-fly image recognition technology which allows component recognition without stopping while moving after component pickup, placement speed is maximized by minimizing the moving time between the pickup position and placement position and reducing the recognition time to zero.

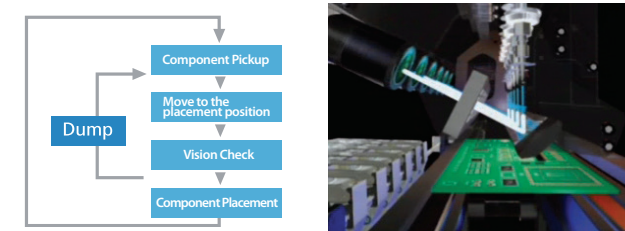

Added a new function maximizing the operational convenience of customers

Easy Component Registration New Part Editor



A Drag & Drop component registration system, allowing registration of component information through automatic recognition and rotation by simply clicking the mouse. (When applying Elite2)

In addition, user convenience is further reinforced by unifying the on-line/off-line component registration systems.

Panorama View Function



Since large-sized components are not viewed in one screen, it is hard to adjust their pickup or placement positions. In order to remove such inconvenience, the panorama view function is added to allow large components to be viewed within the FOV of a camera.


The highest applicability to long and large PCBs among machines of the same class

Description	Single Lane	Dual Lane
SM471PLUS	Max.610(L)x460(W)	Max.610(L)x250(W)
SM481PLUS	Max.1,500(L)x460(W)	-
SM482PLUS	Max.1,200(L)x510(W)	-
SM485	Max.740(L)x460(W)	-

※When applying an option for a large PCB

Mixed Use of Electric Feeder and Pneumatic Feeder

Mixed use of electric and pneumatic feeders in the same feeder base is available for SM series component placers. The investment in production can be minimized by using these feeders along with existing feeders.



Component Monitoring before/after Placement



Checks for nozzle contamination during production to prevent non-insertion and dumping of a large number of components in advance, ensuring high quality production.

Time of inspection - Before/after ANC; before/after component placement; and after component dumping

Multi-Vendor Component Management Function

No.	IO	Part	SubPart
1			
2			
3			
4			
5	R1005		R1005.1
6	R1005		R1005.2
7	R1005		R1005.3
8			None
9			R1005.1
10			R1005.2
11			R1005.3

When the same components are supplied from different component supply devices, this function allows components to be used without changing a PCB file and downloading a new PCB file.

Fast Chip Shooter

SM471 PLUS

The SM471PLUS is a high performance chip shooter which applies two gantries equipped with 10 spindles per head as well as a new Fly Camera system. Compared to the existing SM471 model, its placement speed is increased further to 78,000CPH, which is the highest in the world among chip shooters of the same class. In addition, it is basically applicable to components from 0402 (01005inch) chips to maximum □ 14mm IC components. Its actual productivity and placement quality is improved by applying high-speed and high precision electrical feeders. With two gantries and dual lane, the SM471PLUS supports various production modes to maximize the productivity of SM series machines.

Features

Placement Speed	Chip 78,000CPH (Optimal)
Applicable Component	0402(01005inch) ~ Max. □ 14mm (h12mm)
Placement Accuracy	±40 _{μm} @μ±3σ/Chip, ±50 _{μm} @μ±3σ/QFP
Applicable PCB	L510xW460 (Standard) L610xW460 (Option)

Dual lane and shuttle conveyor maximizes the productivity of SM series component placers


Dual lane production maximizes the productivity of small boards and the shuttle conveyor ensures extensibility to the production of large boards.



Supports for various production modes according to production characteristics

Join Mode	Common use of front and rear feeders (less than D 250mm)
Single Mode	Production of medium- and large-sized boards (greater than D 250mm)
Twin Mode	Separate placement at front and rear sides (less than D 250mm)

Even when a problem occurs to one placement head or when the components in the feeder runs short, another head can help place components, allowing continuous production without stopping the machine

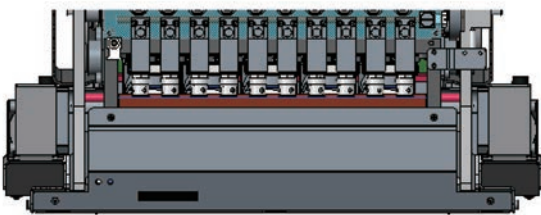

10Spindle x 2Gantry



Flexible Placer

SM481 PLUS


The SM481PLUS can perform high-speed placement of chips at 40,000CPH and QFPs at one per 1.1 seconds, respectively (each at optimum speed) by applying the on-the-fly recognition technology patented by Hanwha, which enables component placement at the highest speed among all medium speed component placers. With one-gantry structure having a high-speed piano head with 10 nozzles, the machine can be operated with minimum manpower using one side of the machine. Being able to produce long boards with lengths of up to 1,500mm, the machine boasts of its applicability to the largest PCBs among SM series component placers.

Features

Placement Speed	Chip 40,000CPH (Optimal)
Applicable Component	0402 ~ □ 16mm (h10mm) (Fly) ~ Max. □ 55mm,L75 (h15mm) (Fix)
Placement Accuracy	±40 _{μm} @μ±3σ/Chip, ±30 _{μm} @μ±3σ/QFP
Applicable PCB	L460xW400x1Lane (Standard) L1,500xW460x1Lane (Option)

Production speed and component coverage suitable for general-purpose high-speed placement

General-purpose high-speed machine among SM series component placers, which applies a high-speed piano head with 10 nozzles and an option for an upward camera.

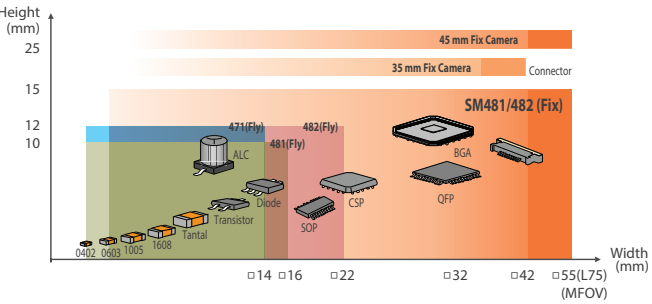


1,500mm long board

Two-staged placement using an extended conveyor allows production of long boards with lengths of up to 1,500mm. (The SM482PLUS can produce boards with lengths of up to 1,200mm)



One-side operation

With single gantry and single lane structures optimized for machine operation using only one side of the machine, the production area and manpower can be utilized efficiently.

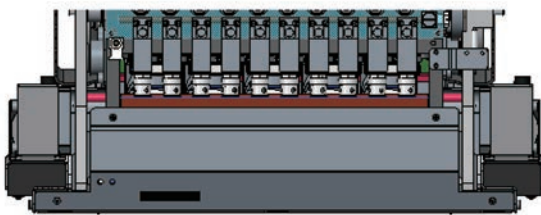

10Spindle x 1Gantry



Multi-Functional Placer

SM482 PLUS

The SM482PLUS can be applied to components from 0603 microchips to □ 22mm IC components by applying the on-the-fly recognition technology patented by Hanwha, which enables component placement at the highest speed among all medium speed component placers. In addition, it can recognize components of □ 42mm with 0.4mm fine pith with a 45mm camera by applying a high pixel Camera system to the Fix camera. It also allows high precision (30 micron) placement of IC components and provides a polygon recognition algorithm for easy registration of components of complicated shapes.


Features

Placement Speed	Chip 30,000CPH (Optimal)
Applicable Component	0603 ~ □ 22mm (h12mm) (Fly) ~ Max. □ 55mm, L75 (h15mm) (Fix)
Placement Accuracy	$\pm 40\mu\text{m}$ @ $\mu\pm 3\sigma$ /Chip, $\pm 30\mu\text{m}$ @ $\mu\pm 3\sigma$ /QFP
Applicable PCB	L460xW400x1Lane (Standard) L1,200xW510x1Lane (Option)

Powerful Camera algorithm



Increases the recognition accuracy using the component image noise removal function and auto-teaching function. The Fly camera helps recognize and calibrate the components including Chip, TR, BGA, QFP, etc., while moving them to the placement position after pickup.

- Automatic Real Time Pickup Position Calibration System
 - Polygon Function
- Abstracts and recognizes a component wholly

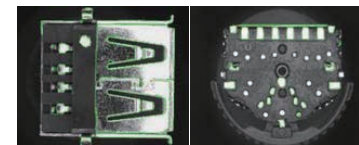

Panorama view

For components whose size exceeds the FOV of a camera, the panorama view function that combines split component images into one is used. The solution optimized for irregular shaped SMD components is provided by teaching the pickup/placement position easily.

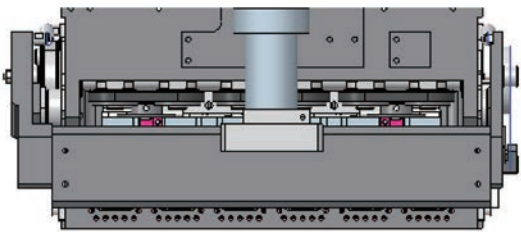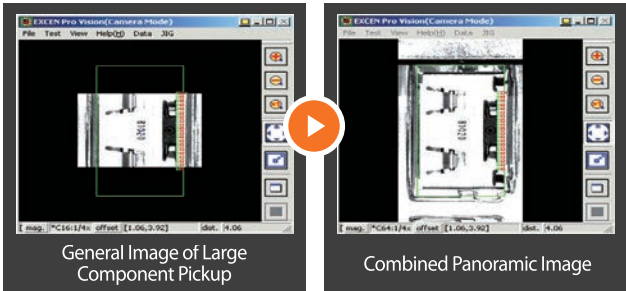

6Spindle x 1Gantry



Wide Ranged Component Placer

SM485


The SM485 is a wide range chip mounter that allows high-speed placement of small components as well as precise placement of odd-shaped components with 4 sets of high-speed spindles and 1 set of precision spindle with back-light system and force control function. It can place various odd-shape components from 0402 chips up to □ 55mm IC components(H26mm), Long connectors of 150mm, Shield cans, Bare chips, Insert components, etc. In addition, The SM485 provides an all-in-one solution that allows high quality placement and management of components from chips to odd-shaped components without adding an extra expensive machine.

Features

Placement Speed	22,000 CPH
Applicable Component	0402 ~ □ 21mm (h15mm) (Fly) ~ □ 55mm (h26mm) (Fix) L150mm x 25mm
Placement Accuracy	$\pm 40\mu\text{m}$ @ $\pm 3\sigma$ /Chip, $\pm 30\mu\text{m}$ @ $\pm 3\sigma$ /IC
Applicable PCB	L460xW400x1Lane (Standard) L740xW460x1Lane (Option)



Optimum solution for the placement of Insert components

Provides various gripper nozzles and force control function to place precisely odd-shaped components of various sizes and heights. Allows precise placements of insert components and bare chips that need to control the pressure in z-axis direction for placements.

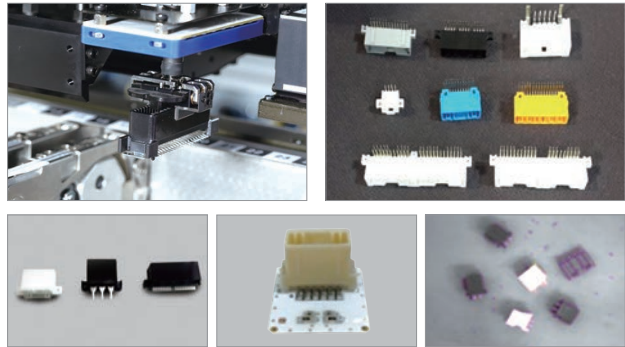

Various lighting for component recognition

Allows more precise placement through shadow recognition by applying backlight for the accurate recognition of components such as shield cans with high reflectivity. In addition, provides the laser lighting as a option to recognize pins of inserted components more accurately.

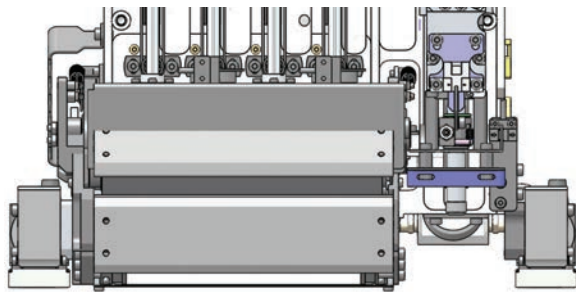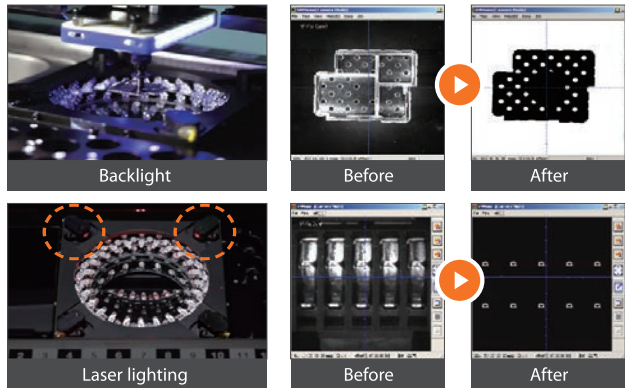

4high-speed+1high precision Spindlex1Gantry



High mix low volume line

SM482PLUS

Chip & Odd Component
30,000CPH(Optimum)



SM471PLUS + SM481PLUS

Chip & Odd Component
118,000CPH(Optimum)



Low mix middle volume line

SM471PLUS (*2) +SM482PLUS

Chip & Odd Component
186,000CPH(Optimum)



High mix middle volume line

SM471PLUS (*2) +SM482PLUS+SM485

Chip & Odd Component
208,000CPH(Optimum)



Performance Improved

SM471PLUS +

Chip only
78,000CPH



+ SM482PLUS

Odd Component
30,000CPH(Optimum)



+ SM481PLUS + SM482PLUS



Odd Component
70,000CPH(Optimum)



※ The above production speed is based on the optimum. It differs depending on the customers' production environment. For a more detailed line configuration, please contact our salesperson.

T-Solution for SM Series

Maximizes productivity in connection with the T-Solution, an optimized software for integrated management, and realizes stable quality.

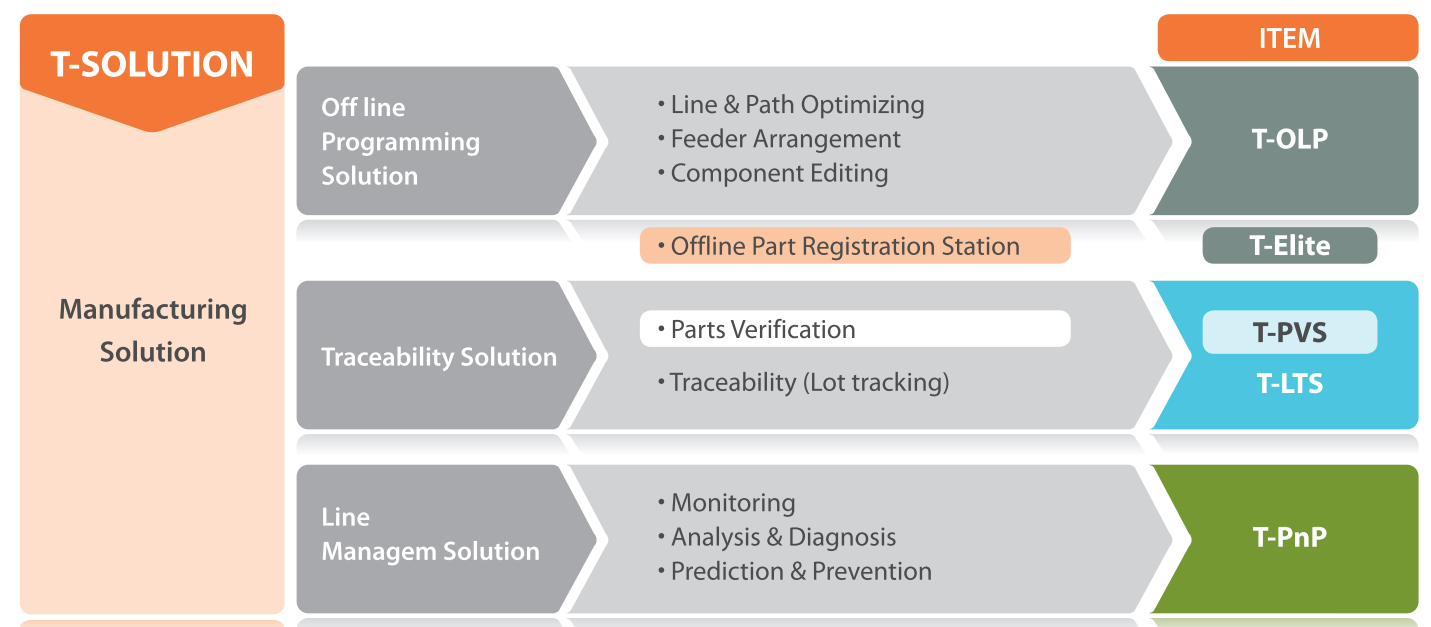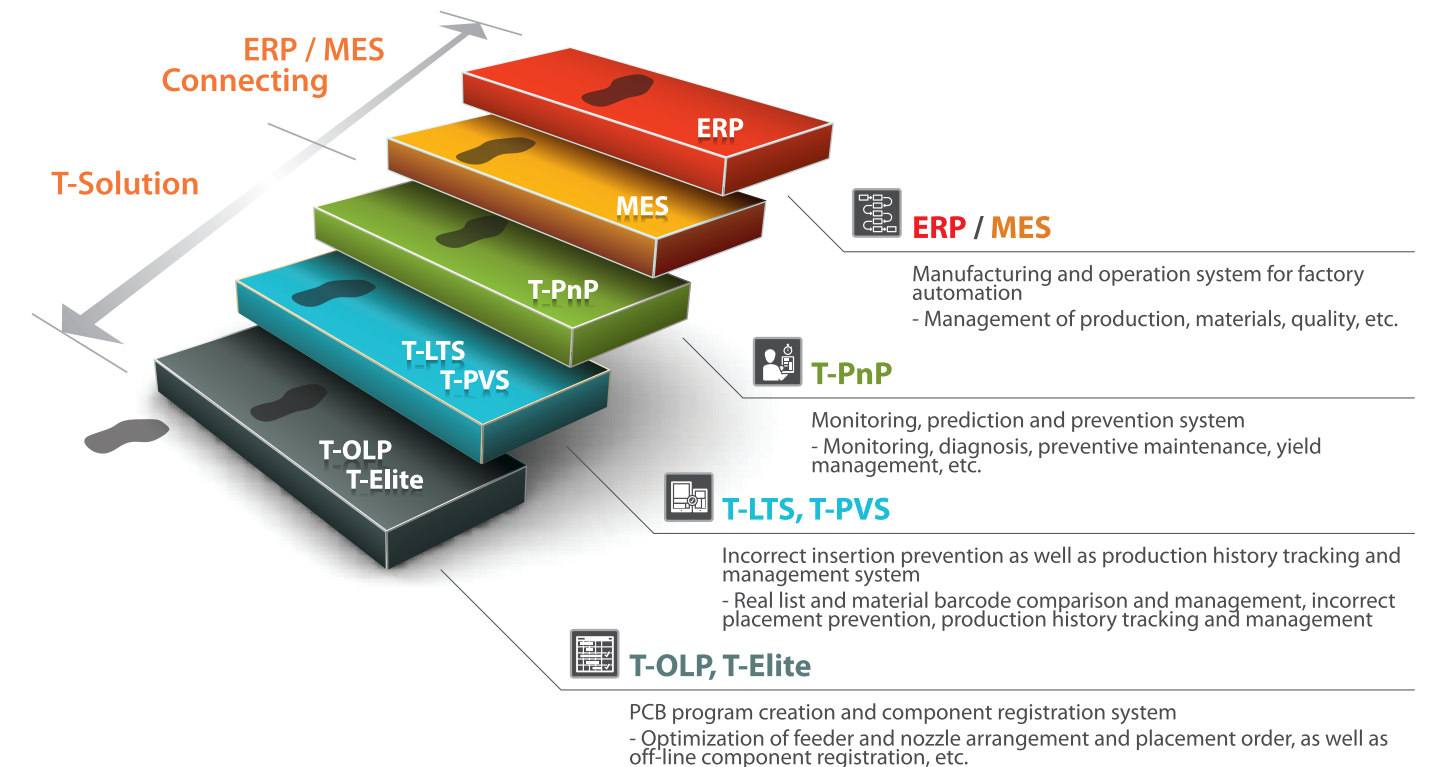

Tray Feeder

STF100D (Dual Magazine Feeder)

- Consisting of the upper and lower magazines with 12 pallets, the dual tray feeder allows the component tray to be replaced without stopping the machine
- Allows various odd-shaped components to be supplied in great quantity
- 24 staged 24 trays / 48 trays



STF100S (Side Tray Feeder)

- Side component supply device
- Maximizes component supply by utilizing the rear feeder base by 100%
- The connecting C/V helps maximize the utilization of the machine
- Allows replacement of the component tray by pallet without stopping the machine



STF100N

- Allows replacement of the component tray by pallet without stopping the machine
- 20 staged 20 trays / 40 trays



One Staged Tray Feeder

- Allows easy installation and removal of a tray feeder in and from a feeder base
- Allows component pickup at high speed
- Allows installation of a tray horizontally or longitudinally according to the shape of a tray
- Available Tray: 2", 4", 136 x 316mm, 200 x 316mm, 272 x 316mm



Stick Feeder

Vibration Feeder

- Frequency control method
- Available voltage and current: DC24V, 0.8A±0.8
- Quantity of sticks to be used: Max. 4 pieces
- Components available for supply: SOP, SOJ, PLCC, Connector, etc.



Stack Stick Feeder

- Available for maximum 9-staged stacking (based on T 20mm stick)
- Non-stop component supply
- Allows easy removal and installation of feeders using the feeder slots as well as air and electricity of the component placer




Tape Feeder

Electric Tape Feeder

- Aligns the pickup positions automatically for the improvement of the simultaneous pickup rate
- Allows the supply speed to be set for stable component supply
- Automatic feeding pitch recognition function
- Allows mixed use with a pneumatic feeder in the same feeder base


W4P1 Feeder

- Possible to handle the W4P1 reel for the supply of 0402 and 03015 microchips
- High supply accuracy



SMART Feeder

- As an 'Auto Loading/Splicing Free' feeder, reduces the manpower required to perform setup and model change
- Applicable to a small quantity of reels



Other Feeders


6-Lane Lens Feeder

- Allows simultaneous supply and pickup of LED lenses at six lanes



Bowl Feeder

- Allows simultaneous supply and pickup of LED lenses at five lanes



Label Feeder

- Allows simultaneous supply of labels at 6 lanes (Applies individual detection sensor)
- Possible to handle reel widths of up to Max. 105mm
- ※ For more detailed specifications of labels, please contact our salesperson



Etc.

Docking Cart


- Feeders are installed in advance or replaced collectively in the docking cart off-line before model change, which helps reduce the feeder replacement time and improve productivity



Etc.

Flux Dipping Unit

- Rotary Flux Dipping Unit
- Installed in the feeder base in the same manner as the tape feeder



Feeder Rack/ Replacement Jig

- Allows safe transport and storage of tape feeders



20 Slot



100 Slot


Tape Cutter

- Reduces operator's work by cutting a tape automatically



Feeder Calibration Jig

Feeder Inspection Function	Supply accuracy inspection Saved data inspection (Serial No, Firmware Version, sensor resetting, mapping)
Feeder Calibration Function	Sensor resetting, mapping serial number change
Available Feeders	SME 8mm W4P1 / 12mm/ 16mm (Option)



Accessories for Traceability Solution

When applying a tray feeder


T-LTS : Traceability (Lot Tracking)

SM481PLUS, SM482PLUS

T-PVS : Parts Verification



Table Top Station



Board Scanner



Reel Scanner




Fiducial Camera(2D)
For Board Barcode
Scanning




Movable Station



Barcode Printer
For ID Registration



SM481PLUS :
The spindle and fiducial camera center recognize two trays (in the width direction)



SM482PLUS :
The spindle and center recognize two trays (in the width direction)

SM481PLUS, SM482PLUS

SM471PLUS

